


BY396 THRU BY399



3.0 AMP FAST RECOVERY RECTIFIERS



FEATURES

- * Low forward voltage drop
- * High current capability
- * High reliability
- * High surge current capability

MECHANICAL DATA


- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 1.10 grams

VOLTAGE RANGE

50 to 1000 Volts

CURRENT

3.0 Ampere

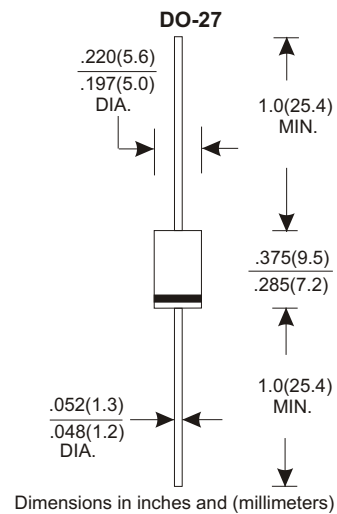

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| TYPE NUMBER | By396 | BY397 | BY398 | By399 | UNITS |
|--|-----------|-------|-------|-------|-------|
| Maximum Recurrent Peak Reverse Voltage | 100 | 200 | 400 | 800 | V |
| Maximum RMS Voltage | 70 | 140 | 280 | 560 | V |
| Maximum DC Blocking Voltage | 100 | 200 | 400 | 800 | V |
| Maximum Average Forward Rectified Current | | | | | |
| .375"(9.5mm) Lead Length at Ta=75°C | 3.0 | | | | A |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | 200 | | | | A |
| Maximum Instantaneous Forward Voltage at 3.0A | 1.25 | | | | V |
| Maximum DC Reverse Current Ta=25°C | 5.0 | | | | A |
| at Rated DC Blocking Voltage Ta=100°C | 150 | | | | A |
| Maximum Reverse Recovery Time (Note 1) | 150 | | 250 | | nS |
| Typical Junction Capacitance (Note 2) | 60 | | | | pF |
| Operating and Storage Temperature Range Tj, TSTG | -65— +150 | | | | °C |

NOTES:

1. Reverse Recovery Time test condition: IF=0.5A, IR=1.0A, IRR=0.25A
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.